



产品规格书

PRODUCT SPECIFICATION

客户名称Buyer Name	
客户料号Buyer Part No.	
客户承认签章 Buyers Approval & Signatures	

文件编号Spec No.		版本	A/0
品名描述 Product Description	圆柱直流马达 Cylindrical DC Motor		
型号Part No.	VZ27C1T7180021L		
送样日期Date			
设计Designed by	审核Checked by	批准Approved by	
陳满	陈满		
2026.08.16	2026.08.16	2026.08.16	

www.vybronic.com

sales@vybronic.com

- 目录/List -

封面/Cover	1/18
目录/Contents	2/18
更改记录/Revision History	3/18
1. 结构形式/Construction Form	4/18
2. 适用范围/Scope Of Application	4/18
3. 测试条件/Testing Condition	5/18
4. 贮存环境/Storage Environment	5/18
5. 电气特性/Electrical Characteristics	5/18
6. 机械特性/Mechanical Characteristics	7/18
7. 可靠性试验/Reliability Test	9/18
8. 寿命试验/Life Test	11/18
9. 环保要求/Environment Protections	12/18
10. 注意事项/Caution	13/18
11. 外形图/Outside View	15/18
12. 结构图及物料清单/Structure Drawing & BOM	16/18
13. 包装要求/Packaging Requirement	17/18
14. 回流老化曲线/Reflow Specification	18/18

更改记录/Revision History

修改号 Rev. No.	日期 Rev. Date	页码 Page No.	修改项目 Revised Item	更改原因 Reason
A/0	2026.08.16	/	初始规格/Preliminary spec	

1.结构形式/Construction Form

本規範適用於微型電機。

This datasheet is stipulated for a micro motor.

NO.	项目/Item	规格/Specifications
1-1	电机结构 Motor construction	Φ2.5 圆柱形铁芯直流电机 Φ2.5 DC Cored motor
1-2	换向片数 Number of phases	3 组换向片 3-phases
1-3	磁极数 Number of magnet poles	两极 (外置磁极型式) 2-poles (Inner magnet type)
1-4	线圈 Coil construction	铁芯线圈 Iron-cored coil
1-5	整流技术 Rectifying method	采用高精度电刷和换向器 Precious brush and commutator

2.使用条件/Standard Operating Condition

NO.	项目/Item	规格/Specifications
2-1	额定电压 Rated voltage	DC1.6V
2-2	使用电压范围 Operating voltage range	DC 1.5~2.0V
2-3	旋转方向 Rotating direction	CW / CCW
2-4	使用温度范围 Operating temperature range	-30℃~+70℃

3.测试条件/Testing Condition

NO.	项目/Item	规格/Specifications
3-1	温度 Temperature	20℃ ±2
3-2	湿度 Humidity	45% ~85%RH
3-3	电源电压 Power supply, voltage source	直流电源或电池 2.7V DC power supply or battery 2.7V
3-4	马达安放状态 Posture of motor	水平/Horizontal

4.贮存环境/Storage Environment


NO.	项目/Item	规格/Specifications
4-1	贮存温度 Storage temp	-40℃ ~+85℃
4-2	相对湿度 relative humidity	5%~95% (No condensation of moisture/无水汽凝结)


5.电气特性/Electrical Characteristic


NO.	项目/Item	单位 /Unit	规格/Spec.	条件/Condition
5-1	额定转速 Rated speed	rpm	16000 ± 3500	额定电压:DC 1.6V Rated voltage:DC 1.6V
5-2	额定电流 Rated current	mA	80Max	在额定电压和额定负载下测试 /Measure at rated voltage and rated load
5-3	启动电流 Starting current	mA	90Max	在额定电压下锁定振动轮，测电机 电流（2/3R 极端电阻处，不在电刷 和整流子两点接触的位置）/Measure current at locked counter weight (R1.3 ×2.3) in rated voltage(2/3R R:1 extreme resisting rate,Not in the position when the brushes contact the commutator at the two contact points)

5-4	启动电压 Starting voltage	V	1.4Max	DC2.3V电压下，开/关为1个循环，共3个循环 On/off-1cycle,total 3cycles under DC2.3V
5-5	端子阻抗 Terminal resistance	Ω	单相 1phase:20+4/-2	正极和负极之间 Between positive and negative
5-6	绝缘电阻 Insulationresistance	M Ω	10Min	测量机壳和引线之间。 测试电压直流100V。 Measuring between case and lead wire.Test voltage DC 100V


6.机械特性/Mechanical Characteristics

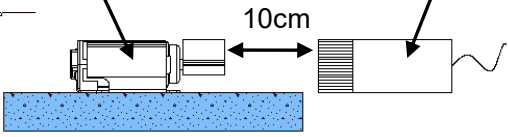NO	项目/Item	单位/Unit	规格/SPEC.	条件/Condition
6-1	外观 Appearance	/		目测/Visual
6-2	尺寸 size	mm	见外形图/See outline of drawing	使用游标卡尺和千分尺测量/Use vernier caliper and micrometer to measure
6-3	马达重量 Motor Weight	g	0.45±0.2g	使用天平测量/Use scale
6-4	机械噪音 Mechanical Noise	dB	50 MAX	 振动马达 Vibration motor 拾音器 microphone 10cm 测试夹具 Testing Jig 马达：被固定/Motor : be fixed 额定电压:DC 2.7V/Rated voltage : DC 2.7V 背景噪音： 25dB MAX. Back ground noise: 25dB MAX. 拾音器沿轴向正对电机平面 Microphone faces the plane of motor along the shaft

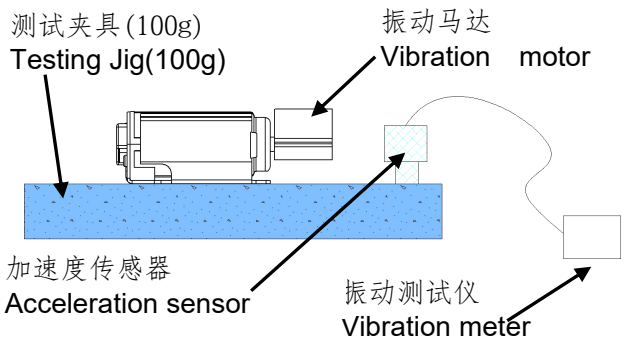6-5	振动量 Vibration Strength	Grms	0.3 MIN	 测试夹具 (100g) Testing Jig(100g) 振动马达 Vibration motor 加速度传感器 Acceleration sensor 振动测试仪 Vibration meter 马达：被固定/Motor: be fixed. 额定电压:DC 1.6V/Rated voltage : DC 1.6V .
		Gp	0.42 MIN	
6-6	响应时间 Responsive Time	ms	65	35ms 达到 50%振感,65ms 达到 90% 振感/ Motor vibration sense reach to 50% within 35ms,and 90% within 65ms.

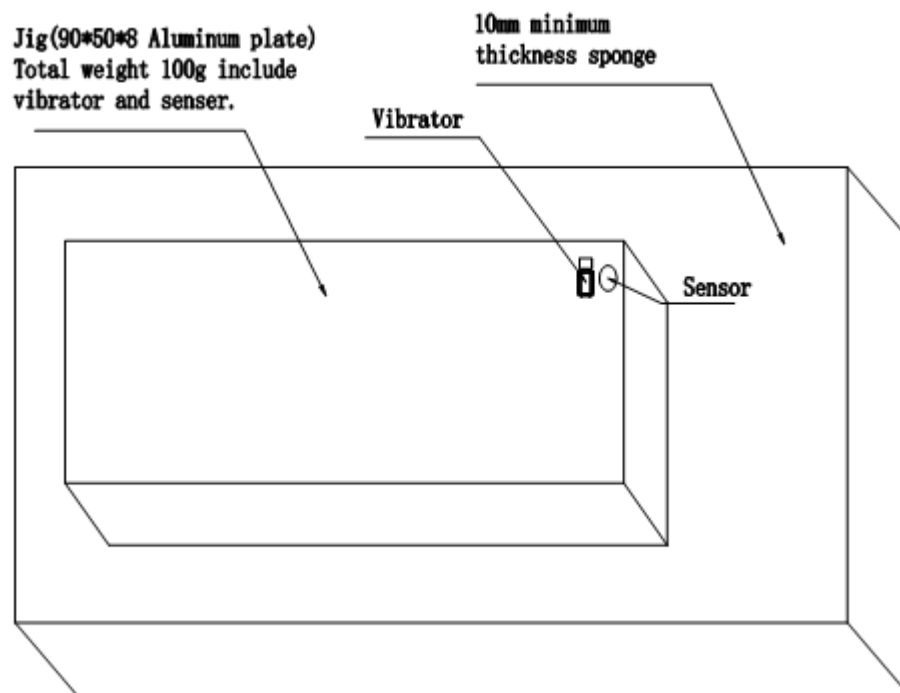
Simulation Vibration test method

7.环境试验/Environmental Test

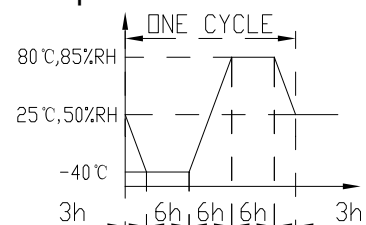NO	项目/Item	条件/Condition
7-1	高温贮存试验 High temperature Storage test	在+80℃的环境下放置96小时，然后在常温常湿下恢复4小时后测试。 Exposed at +80℃ for 96hours, then return to normal temperature and humidity for 4 hours before test.
7-2	低温贮存试验 Low temperature Storage test	在-40℃的环境下放置96小时，然后在常温常湿下恢复4小时后测试。 Exposed at -40℃ for 96hours, then return to normal temperature and humidity for 4 hours before test.
7-3	湿热试验 Humidity test	在温度50℃，湿度95%的环境下放置48小时，然后在常态下放置4小时后测试。/Resistan cetest 48hrs at 50℃,96%HR,then recovery 4hr at normal temperature.
7-4	高低温试验 Heat cycle test	确保电机在下图所示的条件下放置一个周期(马达表面避免有水汽凝结)，然后在室温下恢复4小时后，进行测试。/Confirmed to operating of motor during 1 cycles as following test condition (without presence of water droplets on the motor), then return to normal temperature and humidity for 6 cycle before test. 
7-5	振动试验 Vibration test	将马达固定在100g的塑料夹具上，按以下要求进行试验： 1)振频范围:10-55Hz 2)全振幅 2mm 3)振频变化10-55-10 约1分钟 4)振动方向:三个垂直方向 5)持续时间:每个方向30分钟（共90分钟） The motor that is attached to a 100g jig (plastic housing) and test according following condition: 1)Vibration frequency range: 10~55Hz 2)Total amplitude: 2 mm 3)Sweep ratio: 10~55~10Hz approximate 1min 4)Direction of vibration: Three perpendicular directions 5)Duration: 30min(90min in total)

7-6	跌落试验 Drop test	将马达电机放在大约60g（包括电机）重的物体上,从1.5米的高度跌落到20mm厚的大理石板上，跌落18次。/Drop the motor from the height of 1.5 meters to the marble board of 20mm thick, Drop 18 times. 高度/Height: 1.5m 方向/Direction: $\pm X$, $\pm Y$, $\pm Z$ 次数/Times: 每一平面下落3次，共计18次/Three drops per plane for a total of 18 drops.
-----	-------------------	--

判定标准/Judgment standard

①试验后，测试数据必须符合以下规格：

After test, measured data must be satisfied as following specifications;

- 启动电压: DC2.3V MAX.
- 额定电流: 变化率在初始值的+30%~-30%以内。
- Rated current: changing rate must be within +30%~-30% of initial value.
- 端子阻抗: 变化率在初始值的 $\pm 15\%$ 以内。
- Terminal resistance: changing rate must be within $\pm 15\%$ of initial value.

②外形结构无异常.


There should be no abnormalities in appearance and structure.

8.寿命试验/Life Test

输入1.6V电压/Input voltage 1.6V.

带负载重量 (R1.3, t2.3大约0.125g) /Load counter weight (R1.3, t2.3 appx0.125g).

NO	项目/Item	条件/Condition
8-1	常温寿命试验/Room Temperature Life Test	放置在室温 $25\pm 2^{\circ}\text{C}$, 50%RH 的湿度条件下/Room Temperature exposure $25\pm 2^{\circ}\text{C}$, 50%RH .
8-2	高温高湿寿命试验 /High temperature and Humidity Exposure Life test	放置在高温 $55\pm 2^{\circ}\text{C}$,95%RH 的条件下/High Temperature exposure $55\pm 2^{\circ}\text{C}$,95%RH .
8-3	低温寿命试验 /Low temperature Exposure Life test	放置在高温 $-10\pm 2^{\circ}\text{C}$ 的条件下/Low Temperature exposure $-10\pm 2^{\circ}\text{C}$.

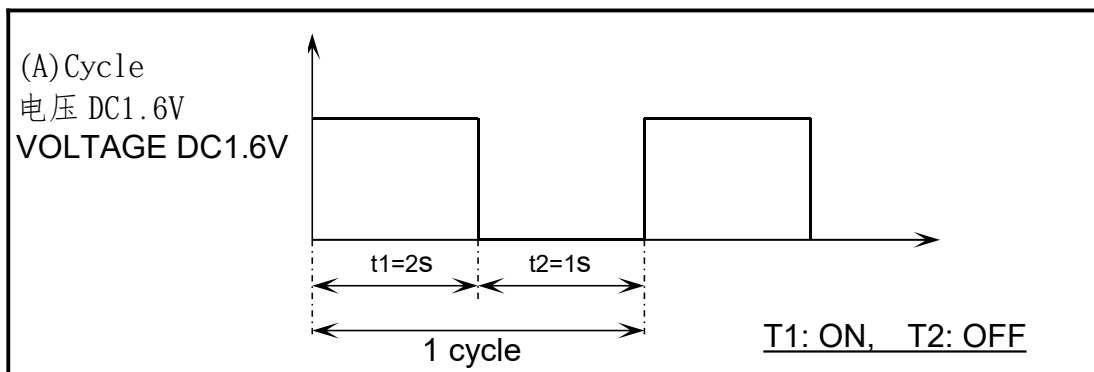

8-1-1 常温寿命试验/Room Temperature Life Test

1.按A周期运行72小时/To maintain (A)cycle for 72hrs in the process of temperature shock.

8-2-1 高温寿命试验/High temperature Exposure Life test

1.按A周期运行24小时/To maintain(A)cycle under high temperature for 24hrs.

8-3-1 低温寿命试验/Low temperature Exposure Life test

1.按A周期运行24小时/To maintain(A)cycle under high temperature for 24hrs.

▶ 判定标准/Judgment standard

②试验后，测试数据必须符合以下规格：

After test, measured data must be satisfied as following specifications;

- 启动电压: DC1.4V MAX.
- Starting voltage: DC1.4V MAX.
- 额定转速: 变化率在初始值的+30%~-30%以内。
- Rated speed: changing rate must be within +30%~-30% of initial value.
- 额定电流: 变化率在初始值的+30%~-30%以内。
- Rated current: changing rate must be within +30%~-30%of initial value.

9. 环保要求/Environment Protections

本产品所有零部件符合欧盟RoHS指令（2011/65/EU,(EU)2015/863//无卤/REACH指令要求，具体环境有害物质管控限制如下：

This product conforms to the EU ROHS(2011/65/EU,(EU)2015/863, halogen-free and REACH certification, Specific content as follows:

铅及其化合物最大允许含量为1000ppm/Lead and Lead compounds $\leq$ 1000ppm

镉及其化合物最大允许含量为100ppm/Cadmium and cadmium compounds $\leq$ 100ppm

汞及其化合物最大允许含量为1000ppm/Mercury and Mercury compounds $\leq$ 1000ppm

六价铬化物最大允许含量为1000ppm/Hexavalent chromium compounds $\leq$ 1000ppm

多溴联苯(PBB)最大允许含量为1000ppm/Polybrominated biphenylethers $\leq$ 1000ppm

多溴联苯醚(PBDE)最大允许含量为1000ppm/Polybrominated diphenylethers $\leq$

1000ppm

邻苯二甲酸二异丁酯（DIBP）最大允许含量为1000ppm /DIBP $\leq$ 1000ppm

邻苯二甲酸二丁酯(DBP)最大允许含量为1000ppm /DBP $\leq$ 1000ppm

邻苯二甲酸苄基酯(BBP)最大允许含量为1000ppm/BBP $\leq$ 1000ppm

邻苯二甲酸二（2-乙基己基酯(DEHP)最大允许含量为1000ppm/DEHP $\leq$ 1000ppm

六溴环十二烷(HBCDD)最大允许含量为1000ppm/HBCDD $\leq$ 1000ppm

溴Br最大允许含量为900ppm/Br $\leq$ 900ppm

氯Cl最大允许含量为900ppm/Cl $\leq$ 900ppm

溴加氯之和最大允许含量为1500ppm/Br+Cl $\leq$ 1500ppm

REACH 指令按最新法规内容管控执行/The instructions are subject to the latest regulations

包装材料环保管控要求：Pb, Cd, Hg, Cr+6 : 4种物质总和 $<$ 100ppm (其中, Cd $<$ 50ppm)。

/Environmental control requirements for packaging materials

: Pb+Cd+Hg+Cr6 $<$ 100ppm (其中, Cd $<$ 50ppm)

10.注意事项/Caution

- (1)该马达是微型精密产品，在运输过程中不要承受超过0.5 kgf的力，否则会引起外形或性能的变化。

As this motor is small and precise, do not press it over 0.5kgf force or while transportation, it can cause the transformation of performance or external appearance.

- (2) 请注意马达不要接触到液体性物质（比如：水，酒精等）
please be careful, not to be contacted fluid substances
(such as: water, alcohol etc.)

- (3) 不要在高温下长时间放置，否则有可能导致电机的性能下降。

Do not expose the motor to high temperature for a long periods of time, it may cause a decline in performance.

- (4) 马达不要在以下环境中使用：

- 高温和高湿的场所
- 腐蚀性气体如H₂S、SO₂、NO₂等

Avoid using the motor in the following environment.

- High temperature and high humidity area.
- Corrosive gas such as H₂S、SO₂、NO₂ etc.

- (5) 请不要在靠近磁铁或带有磁场的仪器旁边使用或存放马达。

Please do not operate or store the motor adjacent to magnet or apparatus
That has a magnetic field.

- (6)请注意机壳的表面存在漏磁通量。

Please be careful that there exists a leaking magnetic flux on
the surface of bracket

- (7)电刷和换向器的相互作用，有可能产生轻微的电噪音。

Due to interaction between brush and commutator, there is a possibility
to occur electrical noise slightly.

- (8) 若發生任何問題，使用者與 Vybronic 雙方應共同努力解決。

If any problems occur, both the user and Vybronic side shall try to
solve the problem together.

- (9) 因测试设备有误差，允许有 $\pm 5\%$ 偏差。

Beacause there is error of the measurement equipment ,permit the standard of the rotational frequency to $\pm 5\%$

- (10) 接电端子扭曲、折弯次数不可多于 2 次。

Current terminals should not be twisted or bent more than twice.

- (11) 被焊锡的端子局部受压不可多于2次/The portion when lead wire and terminal are soldered should not be under stressed more than twice.

- (12) 在马达通电时，不宜长时间锁住不转/Do not subject the motor under locked condition for long hours.

- (13) 不可向马达一侧强行挤压接电端子/Do not exert pressure by pushing the current terminals towards the direction of the internal motor.

- (14) 请在 6 个月内使用，在使用时和打开包装时，请避免水汽凝结。

Please use the motors within six months and prevent them from coagulation of moisture when open the pockage and use them.

- (15) 马达通过ROHS认证

This motor pass the system of ROHS certification.

- (16)

出厂检验报告附上 35 只马达特性数据和 CPK 值,其中包括:

负载转速: rpm

负载电流: mA

堵转电流 (启动电流): mA

启动电压: 不考虑 CPK 值

Attached to OQC report are 35 motors' characteristic data and CPK value, including:

Loaded rotation: rpm.

Loaded current: mA

Lock current (Starting current): mA

Starting voltage: without the consideration of CPK value .


11.外形图/Outside View

技术要求/Technique requests:


1. 电机轴向间隙 0.3mm Max/

Axial play of shaft is 0.3mm max
when counterweight rotating;

2. A面、B面共面，A、B面的高度差为-0.03~+0.1mm/
Coplanarity Plane A and B are coplanar, altitude tolerance
of plane of A with B is -0.03~+0.1。

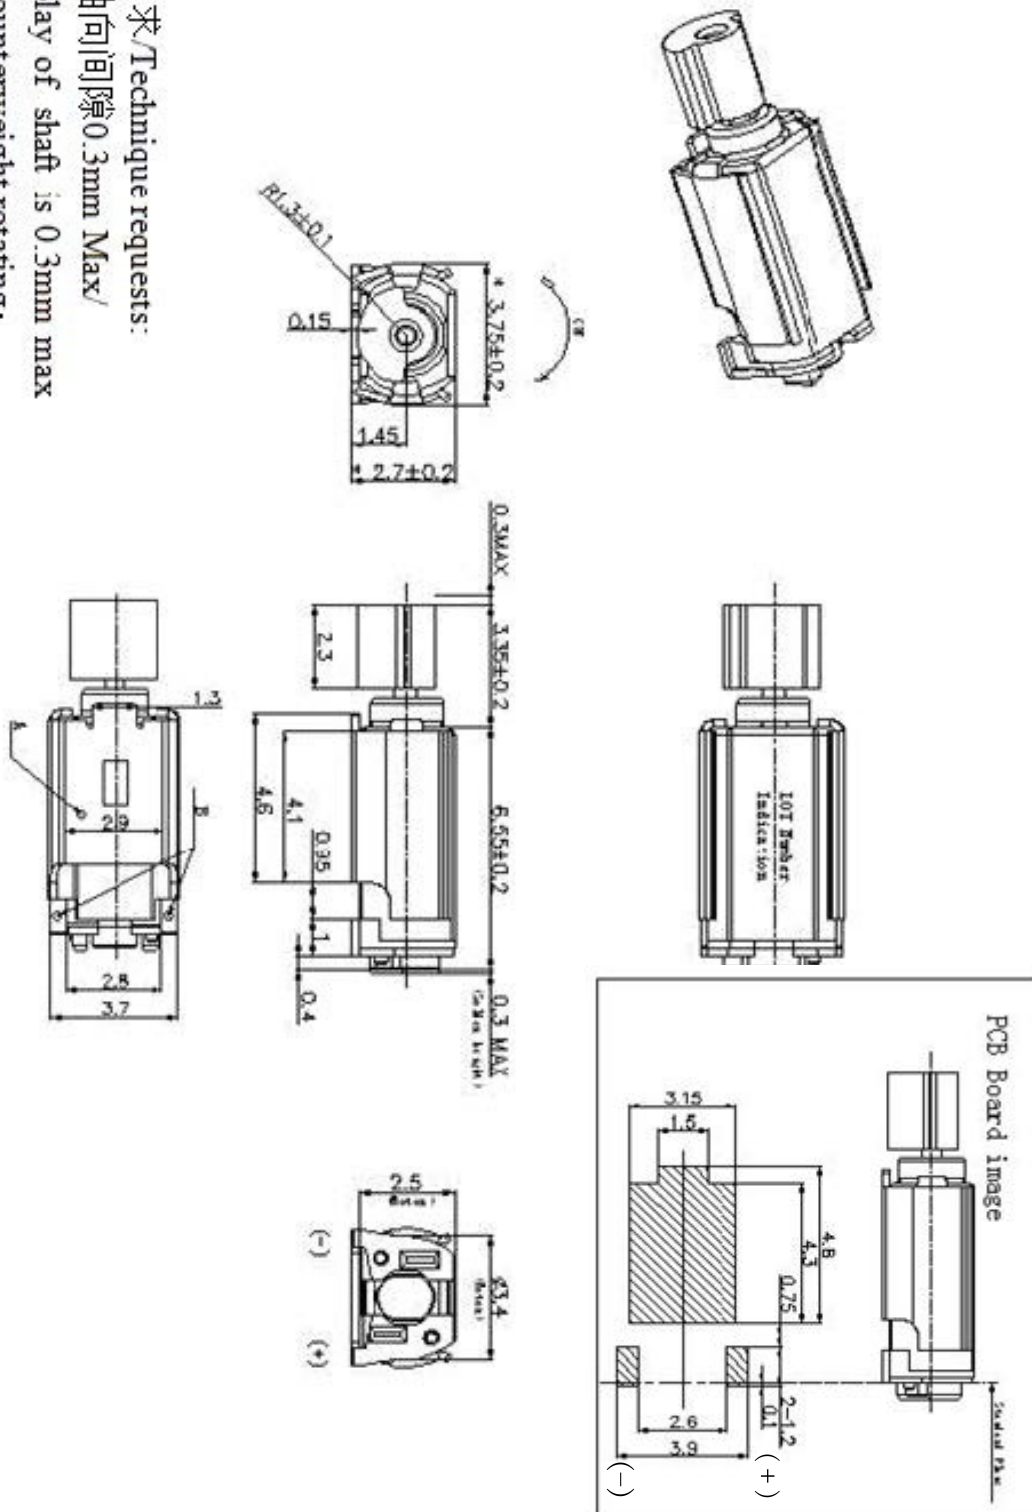


12. 结构图及物料清单/Structure Drawing & BOM

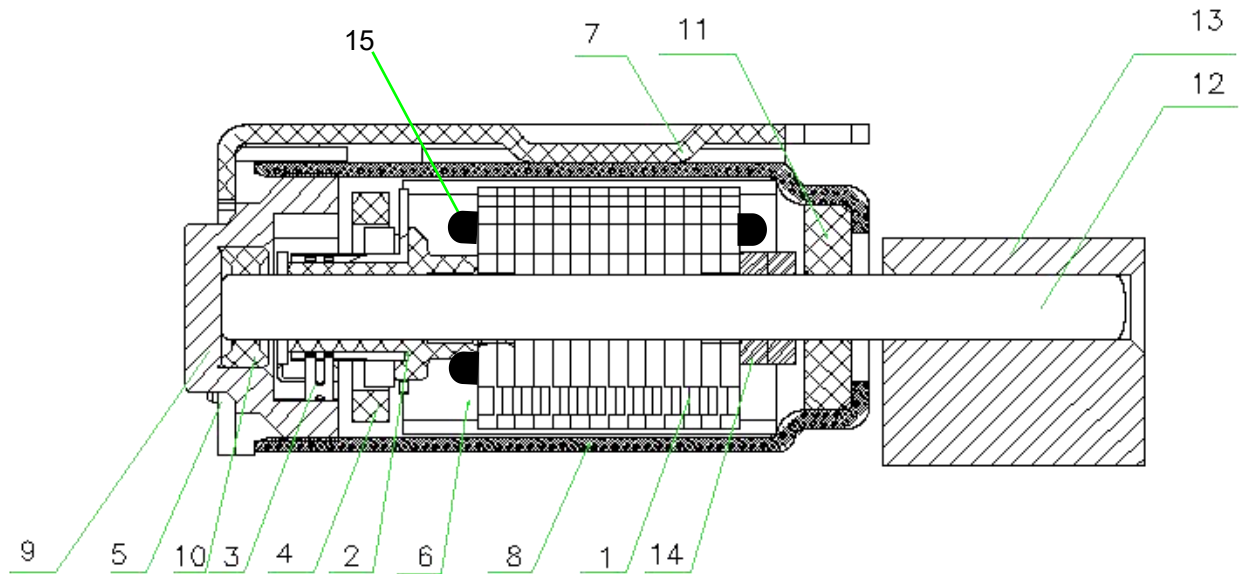

NO.	部件名称/Part name	材料名称/Material name
1	涂装铁芯/Iron core	20HTH1500
2	整流子/Commutator slice	GMX215/LCP
3	电刷/Brush	GMX96
4	变阻/Varistor	钛酸锶/SrTiO3
5	焊锡端子/Terminal	黄磷铜/Yellow phosphorus copper
6	磁钢/Magnet	钕铁硼/NdFeB
7	支架/Bracket	SUS301
8	机壳/Case	SPCC
9	基板/Brush board	PA46
10	外壳轴承/Bearing	铜铁基/Cu
11	基板轴承/bearing	铜铁基/Cu
12	钢轴/Shaft	DSR7B
13	分铜/Counterweight	钨合金/Tungsten alloy
14	套管/Casing	PA46
15	漆包线/Enamel Covered wire	铜线/Cu

14. 生产过程中回流老化后检查 / The inspection after reflowing is implemented in product process.

Reflow Specification

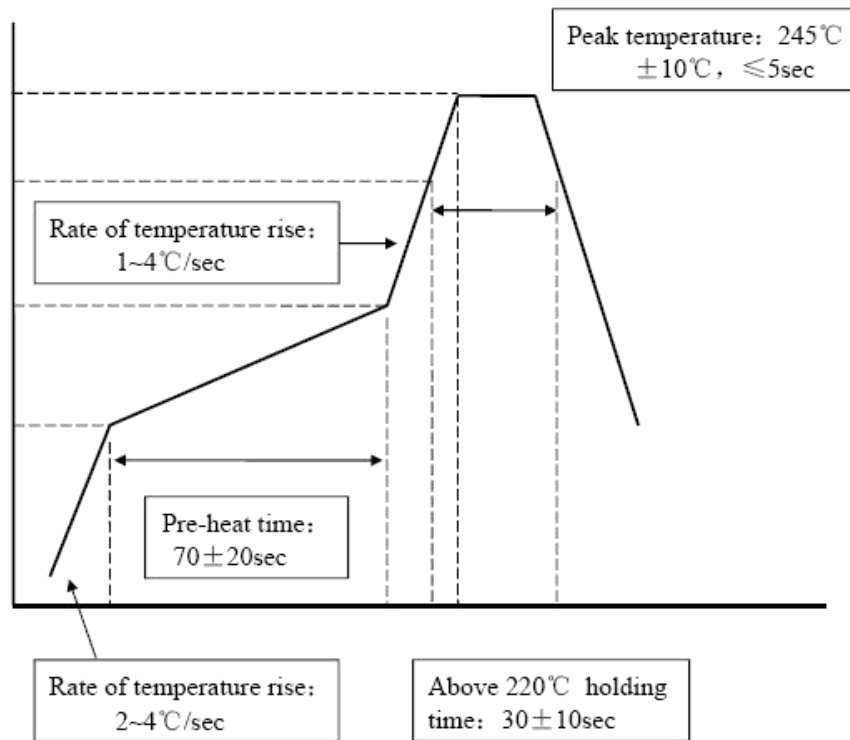

Peak temperature maximum $245^\circ\text{C}/5 \text{ sec}$.