
















10. 外形图/Outline Drawing

- 技术要求/Technic requirement
- 1.额定电压/Rated voltage:3.0V
  - 2.额定电流/Rated current:90mA Max
  - 3.额定转速/Rated speed:7000 ± 2000rpm
  - 4.堵转电流/Stall current:125mA Max
  - 5.端子阻抗/Terminal resistance:30Ω( ± 20%)
  - 6.启动电压/Starting voltage:1.7V Max
  - 7.轴向间隙/Shaft end play:0.1~0.3mm
  - 8.所有尺寸为A向压紧后的尺寸(不包括轴向间隙)  
/Overall length is measured after counterweight being pressed against body in direction A. (Shaft end play is not included.)
  - 9.未注线性公差为/Unmarked tolerance: ± 0.1mm

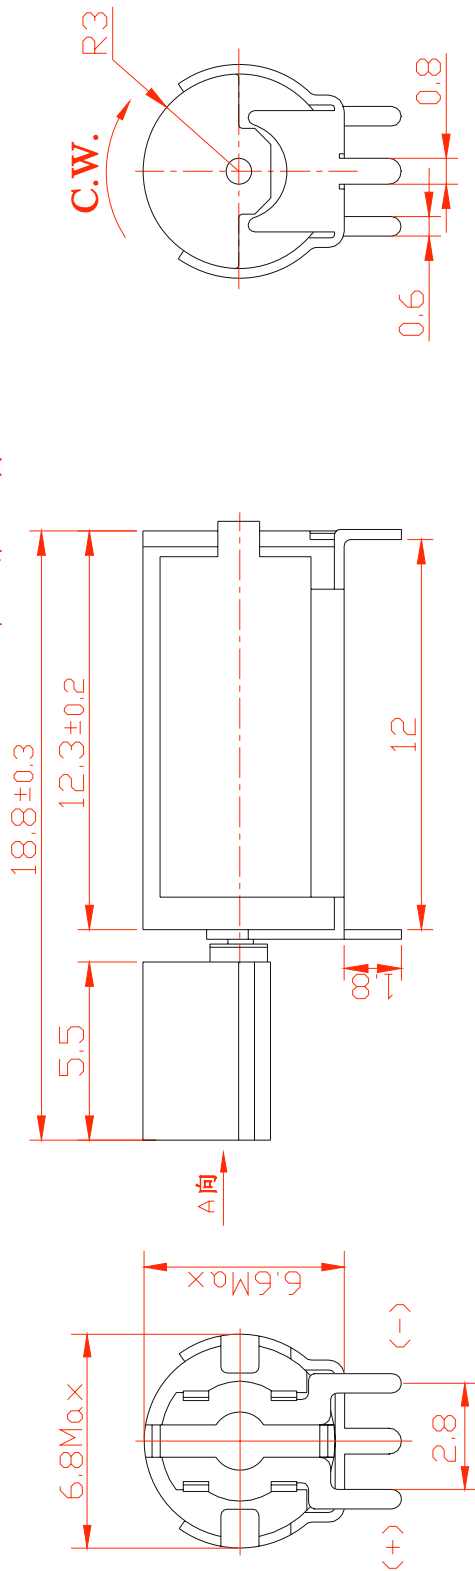

Vybronic		外形图		VZ6DC1B0730091	
设计	杨 兰	更改文件号	郭梦秋	阶段标记	重量
校对	杨 兰	2013.03.08	标准华	2013.03.08	比例
审核	杨 准 华	2013.03.08			5:1
工艺				共 页	第 页
				批 准	彭 小 华
				2013.03.08	

借(通)用件登记

底图总号

签 字

日 期



## 11. 修改记录/Revision History

修改号 Rev. No.	日期 Rev. Date	页码 Page No.	修改项目 Revised Item	更改原因 Reason
A/0	2013.03.08	/	产品颁布/ Release for Production	
A/1	2020.07.01	/	changed company name from JINLONG MACHINERY to VYBRONICS, changed part # from Z6DC1B0730091 to VZ6DC1B0730091	Rebranding