

# 产品规格书

### PRODUCT SPECIFICATION

| 客户名称Buyer Name                         |  |
|--|--|
| 客户料号Buyer Part No.                     |  |
| 客户承认签章<br>Buyers Approval & Signatures |  |

| 文件编号Spec No.                |                                  | 版本     | A/1       |
|-----------------------------|----------------------------------|--------|-----------|
| 品名描述<br>Product Description | 无刷直流振动马达<br>BLDC Vibration Motor |        |           |
| 型号Part No.                  | VW0825                           | AB001F |           |
| 送样日期Date                    |                                  |        |           |
| 设计Designed by               | 审核Checked by                     | 批准App  | proved by |
| PAR                         | 本其                               | %      |           |
| 2021.08.16                  | 2021.08.16                       | 2021   | .08.16    |

www.vybronics.com sales@vybronics.com



#### PRODUCT SPECIFICATION

产品规格书

VW0825AB001F

NO: 2/12

## 修订记录 Revision record

| 修改号<br>Rev. No. | 日期<br>Rev. Date | 页码<br>Page No. | 修改项目<br>Revised Item   | 更改原因<br>Reason |
|-----------------|-----------------|----------------|--|----------------|
| A/0             | 2017.10.31      | /              | 产品颁布/Release for Production  |                |
| A/1             | 2021.08.16      | /              | Changed company name from<br>JINLONG MACHINERY to<br>VYBRONICS, changed part # from<br>W0825AB001G to VW0825AB001G | Rebranding     |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |
|                 |                 |                |  |                |



## VW0825AB001F NO: 3/12

## 目 录Table of Contents

| 修i | 丁记录Revision record                    |
|----|---------------------------------------|
| 目  | 录Table of Contents                    |
| 1  | 适用范围General Scope of Application      |
| 2  | 使用条件Applicable Conditions             |
| 3  | 测试条件Measurement Conditions            |
| 4  | 电气性能Electrical Characteristics        |
| 5  | 马达结构Part list                         |
| 6  | 机械性能Mechanical Characteristics        |
| 7  | 可靠性能Reliability Tests                 |
| 8  | 判定基准Judgments after Reliability Tests |
| 9  | 使用时注意事项Cautions for Use10             |
| 10 | 包装Packing (TBD)11                     |
| 11 | 外形图Outline drawings 12                |

## 1 适用范围General Scope of Application

本说明书适用于无刷直流振动马达 VW0825AB001F。

This specification applies to BLDC Vibration Motor model VW0825AB001F.

## 2 使用条件Applicable Conditions

|     | 项目Item                   | 规格Specification   |
|-----|--------------------------|---|
| 2.1 | 额定电压Rated voltage        | 3.0V DC   |
| 2.2 | 使用电压范围Operating voltage  | 2.7~3.3V DC   |
| 2.3 | 旋转方向Rotation             | CW  |
| 2.4 | 使用条件Operating Conditions | 温度Temperature-20℃~+60℃,<br>湿度Ordinary Humidity:65±20%RH |
| 2.5 | 保存条件Storage Conditions   | 温度Temperature -30~+85℃,<br>湿度Ordinary Humidity:65±20%RH |


### 3 测试条件Measurement Conditions

正常情况下马达在温度22~28℃和湿度45~85%RH的环境中测试;为保证测试的一致性,所以按下表规定范围内进行: Normal dismounted in 22 to 28 ℃ temperature and humidity of 45 ~ 85% RH environment test; In order to ensure the consistency of the test, so within the scope as stipulated in the table below:

| 项目Item |                         | 规格Specification    |
|--------|-------------------------|--------------------|
| 3.1    | 温度Temperature           | 25±3℃              |
| 3.2    | 湿度Humidity              | 65 ± 20% RH        |
| 3.3    | 气压 Atmospheric pressure | 1,013 hpa ± 40 hpa |

VW0825AB001F

NO: 5/12

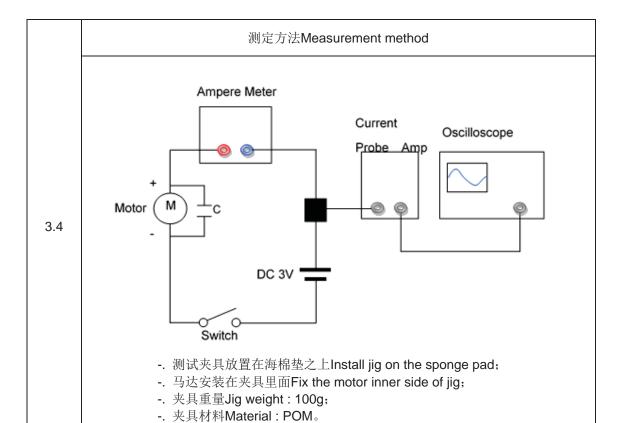


#### 回路图Circuit diagram

霍尔片通过内置的Drive IC向Coil供电,Coil产生电磁力,此电磁力与转子rotor上magnet的磁力产生作用,此时机壳上的霍尔IC内置Drive IC感应到magnet极性,从而间断向coil供应电流使转子连续转动。

The Coil receives current from Drive IC which include whole element. It makes coil get electric force. This electric power and magnet force of installed magnet in Rotor make revolution by Fleming's left hands law. While it happens, the Rotor can spin continually by whole element in Rotor supply current to Coil alternatively through whole element notices magnetic pole.

3.5






### 4 电气性能Electrical Characteristics

| 项目Item |                                      | 规格Specification | 条件Condition  |
|--------|--------------------------------------|-----------------|--|
| 4.1    | .1 额定转速Rated speed 15,000±3,000rpm   |                 |  |
| 4.2    | 额定消耗电流 Operating consumption current | 80mA Max        | 额定电压下<br>At rated voltage.                                       |
| 4.3    | 启动电流Starting current                 | 175mA Max       |  |
| 4.4    | 启动电压<br>Starting voltage             | 2.5V DC Min     | 在最小起动电压下启动。<br>Motor is rotating at minimum<br>starting voltage. |
| 4.5    | 绝缘电阻<br>Insulation resistance        | 10MΩ Min        | 在100V直流下,端子和机壳间。<br>At DC 100V between Terminals<br>and case.    |

## 5 马达结构Part list

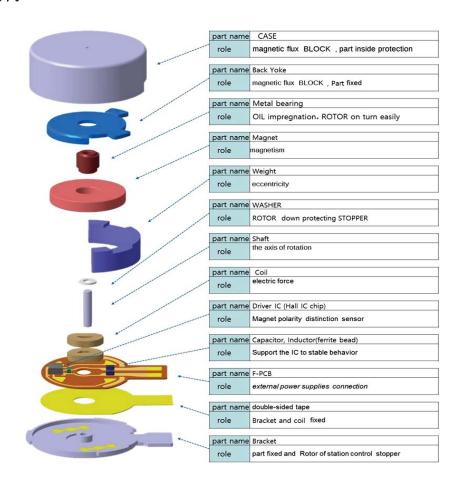

## 6 机械性能Mechanical Characteristics

| 项目Item |   | 规格Specification   |  |
|--------|---|---|--|
| 6.1    | 振动量<br>Vibration strength   | 1.0 Grms以上(在额定电压下,100g的模板上测试<br>Measured @100g jig under rated voltage) |  |
| 6.2    | 重量/Weight   | 0.75g±10%   |  |
| 6.3    | 抗压力<br>Resistance to pressure   | 3.0kgf Max  |  |
|        | 机械噪音<br>Mechanical noise  | 小于50分贝. A计权<br>50dB (A) Max   |  |
| 6.4    | 在额定电压下。At rated voltag<br>背景噪音:不大于25dB,A计权<br>Back ground noise < 25dB, (A) | . MIC   |  |

## 7 可靠性能Reliability Tests

| 项目Item |              | 规格Specification   | 判定标准Judgment   |
|--------|--------------|---|--|
| 7.1    | 自然跌落<br>Drop | 1)试验状态Test mode: 将马达固定在约180克<br>(包括马达本身)的物体上,落向钢板面。<br>Set the motor to a fixture of approx. 180g<br>(include the motor) and drop it onto the steel<br>surface.<br>2)高度Height: 1.5米m<br>3)方向Direction: 6面faces 4角horn<br>4)次数Number of times: 各3次 Each 3 times<br>(总共30次 Total 30 times drop) | 测试结果应符合8.1<br>项要求。The test<br>result should meet<br>the requirements of<br>item 8.1. |



## VW0825AB001F NO: 8/12

|     | 项目Item                                  | 规格Specification  | 判定标准Judgment   |
|-----|---|--|--|
| 7.2 | 滚筒<br>Tumbling<br>box                   | 1)试验状态Test status:将马达固定在重量约 180克(包括马达本身)的物体上,放在滚筒 机内;Fix the motor on a object weighted about 180g (include the motor) and it inside mixing mill; 2)高度Height: 1米m; 3)次数: 200 次times. | 测试结果应符合8.1 项<br>要求。The test result<br>should meet the<br>requirements of item<br>8.1.                  |
| 7.3 | 低温放置<br>Low<br>temperature<br>exposure  | 1)温度Temperature: —40±2℃<br>2)时间Time: 120h  | 在常温下放置2小时  |
| 7.4 | 高温放置<br>High<br>temperature<br>exposure | 1)温度Temperature: +85±2℃<br>2)时间Time: 120h  | 后,马达应符合8.1项<br>要求。After 2 Hour<br>storage, the test result<br>should meet the<br>requirements of item  |
| 7.5 | 高湿放置<br>High<br>Humidity<br>exposure    | 1)温度Temperature: +55±2℃ 2)湿度Humidity: 95±3%RH 3)放置时间Exposure time: 120h 4)无水气凝结No condensation of moisture   | 8.1.   |
| 7.6 | 寿命实验<br>Life test                       | 1)额定电压Rated voltage: 3.0V DC 2)试验模式Test mode: 2S On, 1S Off, as 1 cycle. 3)循环次数Test cycle: 500,000 cycles  | 测试结果应符合8.1 项<br>要求。The test result<br>should meet the<br>requirements of item<br>8.1.                  |
| 7.7 | 热冲击实验<br>Thermal<br>Shock Test          | 1)测试模式Test mode: 1hour at -40℃, 1hour at +85℃, as one cycle. Transfer time between extreme temperatures: <5分/5min 2)循环次数Test cycle:50 cycles  Temp. ℃  +85±3  +20±3  -40±3  Time     | 在常温下放置2小时后,马达应符合8.1项要求。After 2 Hour storage, the test result should meet the requirements of item 8.1. |



VW0825AB001F NO: 9/12

|     | 项目Item                     | 规格Specification   | 判定标准Judgment  |
|-----|----------------------------|---|---|
| 7.8 | 盐雾试验<br>Salt spray<br>test | <ol> <li>浓度Concentration: 5% Naci 溶液 / 5% Naci solution;</li> <li>PH值value: 6.57.2;</li> <li>试验槽温度Test chamber temperature: 35±2℃;</li> <li>盐雾沉降量Salt spray deposition: 12ml/80cm2*h;</li> <li>试验时Time: 8Hr.</li> </ol> | 在常温下放置2小时后,马达应符合8.1 项要求。After 2 Hour storage, the test result should meet the requirements of item 8.1. |

## 8 判定基准Judgments after Reliability Tests

| 项目Item 判定基准Requirements |                              | 判定基准Requirements  |  |
|-------------------------|------------------------------|---|--|
| 8.1                     | 特性测试<br>Measurement          | <ol> <li>额定转速Rated speed: 不低于初始值-30%; 不高于初始值+50%。<br/>No lower than -30% of initial data; No more than +50% of initial data.</li> <li>额定电流Rated current: 不低于初始值-30%; 不高于初始值+50%。<br/>No lower than -30% of initial data; No more than +50% of initial data.</li> <li>端阻Terminal resistance: 不大于初始值±15%。<br/>No more than +15% of initial data; No less than -15% of initial data.</li> <li>起动电压Starting voltage: 不大于3.4V直流电压3.4V DC Max.</li> <li>绝缘电阻Insulation resistance:大于3MΩ/3MΩ Min.</li> </ol> |  |
| 8.2                     | 外观检查<br>Visual<br>inspection | 马达外壳不可出现不可擦拭的锈迹。<br>Non-wipe-able rust on the case is not allowed.  |  |

### VW0825AB001F NO: 10/12

### 9 使用时注意事项Cautions for Use

- 9.1 与规格不同使用的情况下性能和寿命会发生问题,希望注意电压使用范围。You might encounter functional and life problems if you use it different from the standard. Please be careful of the range of use, like voltage etc.
- **9.2** MOTOR使用时一定要把图纸上的红色导线(+)端子连接在 (+),蓝和黑色导线 (-)端子连接在(-)后使用。No matter what please connect red lead wire to (+) socket, and blue and black lead wire to (-) socket when you use the motor.
- **9.3** 在有害GAS及高温高湿的场所保管对马达造成不良因素所以请注意保管。Please be careful of that the storage in high temperature and humidity and noxious gas might cause hindrances to motors.
- 9.4 为了减少马达旋转时因检查失误造成电源端子短路导致 Drive IC 损伤,请将2μF电容器并联在马达上与电源插头(+ / -)连接。Drive IC can be damaged by power plug short due to careless test. In order to prevent damage of Driver IC.
- **9.5** please connect  $2\mu$ F condenser to motor in a row(parallel connection) with power plug(+/-).
- **9.6** 拿取马达时,尽可能的轻拿Case部分。Please hold the case part lightly as much as you can when you use motors.
- **9.7** 为保护Drive IC,请不要施加DC 4.5V以上。Please do not use above DC 4.5V for preventing Driver IC.
- 9.8 马达接近磁性物质或接触时会降低马达性能,因此避免接近强磁场。Please avoid being near and contacting magnetic materials like magnet which might encounter functional problems.
- **9.9** 能够自我吸附的物质 (铁、粉末) 及灰尘等与马达混放时会出现转动不良,异常音等,会使马达的性能下降及信赖性受影响,因此取用及作业时应注意环境清洁。If some materials (metal, powder) and dust become mixing condition in the motor it might cause feature declines by occurring rotation faulty and abnormal sound so please be clean the working environment and careful when you deal with the motor.
- 9.10 注意请不要浸泡在液态物质如: 水或酒精中。Please be careful of not soaking in liquid like water or alcohol.
- **9.11** 包装方法: (参照包装图) 只有在客户要求下变更可能。Packing method: Refer to packing drawing. But, it could be changed on user's demand.
- **9.12** 无法保证满足本式样范围以外使用的情况。It can't guarantee if the motors are used out of the range of fulfilling this specification.
- 9.13 本式样书内容的变更及追加是在双方协议下实施。Any further conditions or change of this APPROVAL REQUEST take effect by mutual consent.




VW0825AB001F NO: 11/12

## 10 包装Packing (TBD)

#### 10.1 内, 外径包装规格The Packing Standard

| 项目Item        | 具体内容Specific content |                      |                     |                               |
|---------------|----------------------|----------------------|---------------------|-------------------------------|
|               | 材料<br>Material       | 尺寸Size (mm)          | 包装数量<br>Packing Qty | 包装后重量<br>Weight after packing |
| Tray<br>包装    | PET                  | 328(L)×240(W)×9.5(H) | 100ea Max           | About 121g                    |
| Out box<br>包装 | DW-1                 | 510(L)×350(W)×175(H) | 5,000ea Max         | About 7.6Kg                   |

#### 10.2 包装图Packing drawing

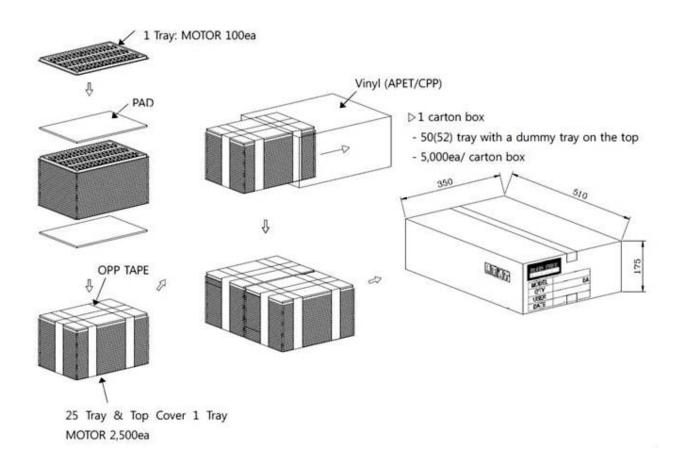



VW0825AB001F NO: 12/12

## 11 外形图Outline drawings

